


Sound insulation roller shutter **25 dB**

CE-marking according to EN 13241



Warehouse outside

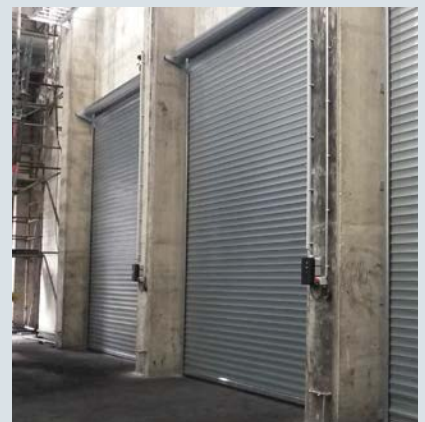

Warehouse inside

Effertz sound insulation roller shutter with a sound reduction index R_w of 25 dB according to ISO 140-3.

Wind load class 2 according to EN 12424.
CE-marked in accordance with EN 13241.

Technical specifications

- Sound insulated hot-galvanized steel shutter with clear coating, infilled with 20 mm PUR foam, profile height 95 mm. Lintel sealing by rubber lips.
- Sensing edge at the bottom bar, helix cable.
- Side guides made of hot-galvanized steel profiles, with rubber sealings at both sides plus outer sealing strip with additional lips
- Bearing brackets made from prime-painted steel.
- Directly coupled electric drive 3/N/PE ~ 400 V 50 Hz, with integrated safety arrestor according to EN 12604.
- With emergency hand-crank.
- Control unit in a plastic casing (w x h x d) 190x300x115 mm with integrated keypad up-stop-down.
- Dead man's control (self-hold to open possible for door height > 2,50m).
- Protection class IP 54.



Industry



Industry



Industry



Theatre stage