


Sound-Insulation Stacking Door 43 dB



CE-marking according to EN 13241



Warehouse outside

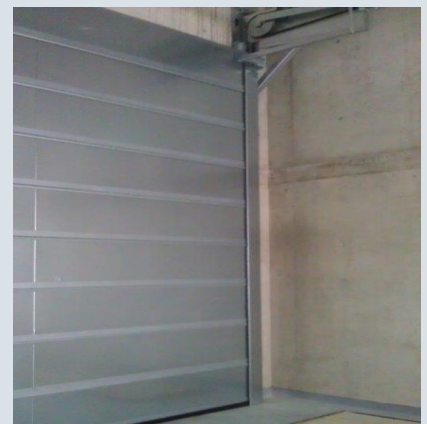

Warehouse inside

Photos may contain special equipment.

Status: 29.04.2021

Description of services

Effertz Sound insulation Roller Shutter with a sound reduction index of 45 dB.

Wind load class 2 according to EN 12424. To be installed on both sides of the wall.

CE-marked in accordance with EN 13241.

Technical specifications

- Door leaf of horizontal sections, which are stacked behind the lintel when opening so that little space is needed.
Outside surface: aluminium with RAL 9006 (white aluminium) paint
Inside surface: hot galvanized steel
- Side guides made of hot galvanized steel, with rubber sealings at both sides.
- Directly coupled electric drive 3/N/PE ~ 400 V, 50 Hz, grade of protection: IP 54, with integrated arrestor according to EN 12604.
Thermal motor protection.
With emergency hand-crank.
Drive side right-hand.
- Control unit in a plastic casing (w x h x d) 190x300x115 mm with integrated foil keypad up-stop-down.
Dead man's control
(self-hold to open possible for door height > 2,50m).
Protection class IP 54. Ready-wired CEE plug with 1 m cable.
- Documentation in English or German in accordance with Effertz documentation standard on CD-ROM.



Industry



Industry



Detail



Detail